

INSTALLATION INSTRUCTIONS EASY-MOUNT radar detector mount for: TESLA MODEL 3 and Y

DO NOT PLACE EASY
MOUNT DIRECTLY IN FRONT
OF THE STEERING WHEEL!
This will defeat the safety
advantages of our product.



For the best installation we recommend using a straight 6-foot-long power cord. Many radar detectors come with this but if you only have a coiled cord you can still install your radar detector with Easy-Mount as shown in instructions. We advise that you purchase a straight cord for the nicest looking installation. They are typically available for less than \$10 on the internet. Clean the dashboard prior to installation.


1

Clean surface and apply the supplied loop fastener to bottom of your radar detector as shown.



2

Align and center radar detector onto Easy-Mount. Press together.

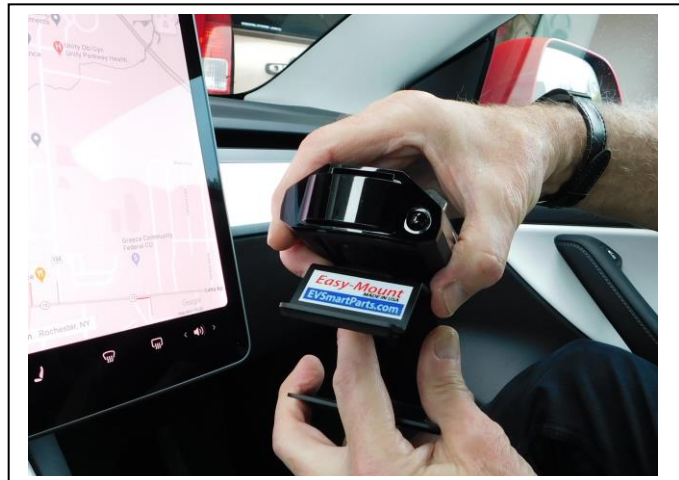

**INSTALLATION INSTRUCTIONS EASY-MOUNT radar detector mount for:
TESLA MODEL 3 and Y**

3

For Straight Cord:

Route the power cable through 2 cable clips as shown then plug in to the detector.



For Coiled Cord: Use your coiled cord temporarily until you can order a straight cord. A straight cord will provide the best looking installation.


Route power cable through 2 cable clips as shown then plug in to detector.



4

DO NOT PLACE EASY MOUNT DIRECTLY IN FRONT OF THE STEERING WHEEL! This will make it difficult to reach and defeat the purpose of the EASY-MOUNT.

Place approximately 19.5" from left end of dashboard. Press forward into slot. Slide it left and right to find the best position for you. You can vary this position left or right as you use Easy-Mount for a few days.

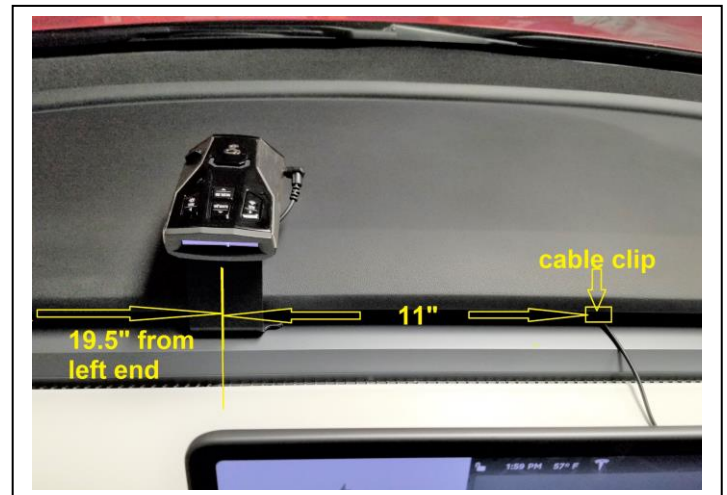


**INSTALLATION INSTRUCTIONS EASY-MOUNT radar detector mount for:
TESLA MODEL 3 and Y**

5

For Straight Cord:

Secure cable into slot with clip approximately 11" to the right of Easy-Mount. Run cable to power outlet.

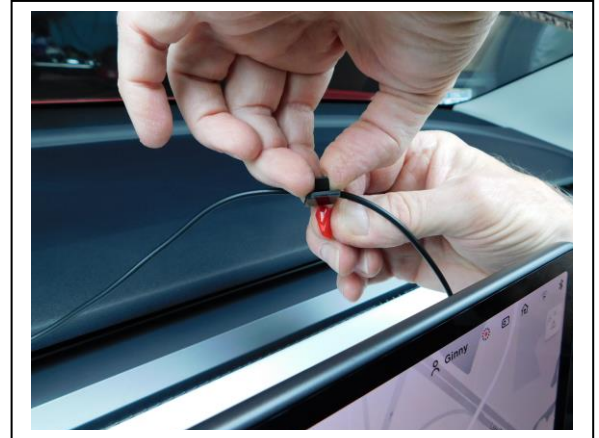

For Coiled Cord:

Run cable straight down and then to power outlet.

Temporarily tuck it under side of center console trim and run it to 12-volt DC power outlet in storage compartment. Use clip as shown in step 7 to secure end of cable. Your installation is COMPLETE!



**INSTALLATION INSTRUCTIONS EASY-MOUNT radar detector mount for:
TESLA MODEL 3 and Y**


6

For Straight Cord:
Run cable down into gap along the side of the center console to power outlet.



7

Secure cable with cable clip so it is not pinched between armrest and square bumper.

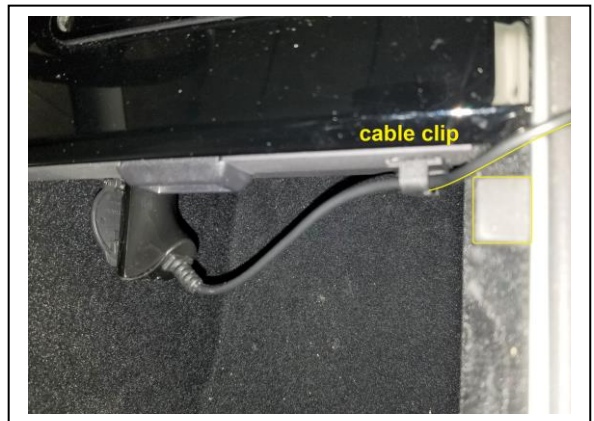

8

Attach Locking strip: Use your EASY-MOUNT for a few days to determine the best ergonomic positioning for you.

With the EASY-MOUNT in the position you prefer, then attach the self-adhesive ¼" x 2" locking strip to the silver portion just below the dashboard. The adhesive faces down. Press it firmly forward into the into the groove as shown in pic 9 before pressing it down to adhere.




**INSTALLATION INSTRUCTIONS EASY-MOUNT radar detector mount for:
TESLA MODEL 3 and Y**

9


Locking strip:

This will secure the EASY-MOUNT from pulling out. Even with this removable strip in place, you can still easily slide EASY-MOUNT left or right to make adjustments in position or to remove it completely.

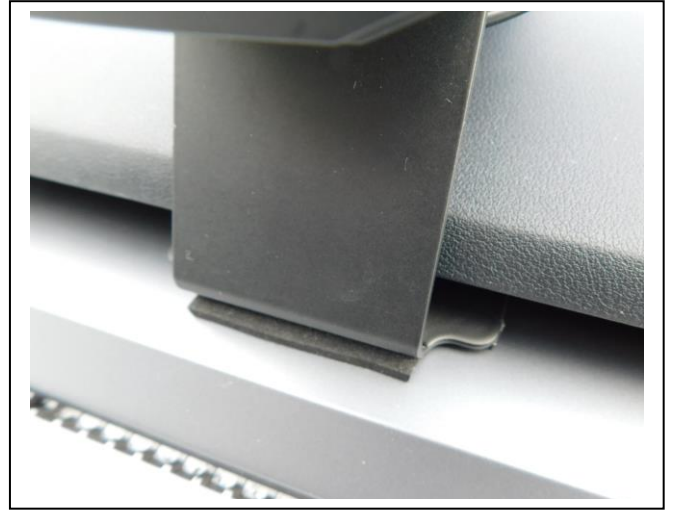

10

IF you need to remove your EASY-MOUNT and Radar Detector to move it to another Model 3 or Y or to clean the dashboard top, just slide it as shown.

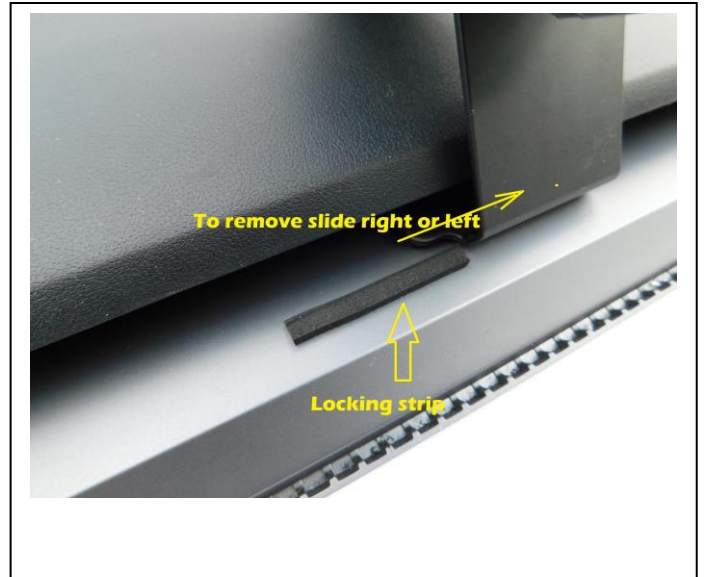

Installation is Complete!